

Under Counter Industrial Garbage Disposals


Çöpماك ST 5700 5,5Hp Three Phase 4 kW

- 4 kW 2900 RPM Three-phase AC motor
- 750 kg garbage grinding capacity per hour 160 mm stainless garbage inlet and 70 mm diameter waste water discharge
- CE, SASO product safety certificate and IP65 energy panel certificate
- IP65 energy panel placed on the device
- Audible warning warning lamps placed on the panel to reduce usage errors
- Pneumatic operation button designed for humid environments (with air operation)
- 316 quality stainless steel, rotary disk and external blade and stainless throat connection elements
- 304 quality stainless steel environmental sheet protecting the device against water, dust and impact
- Audible warning safety thermic preventing the motor from burning against hard particles
- Raisable telescopic feet adjusting the height of the device
- 4 years warranty against rust and decay, 3 years against mechanical failures

Çöpماك ST 5700
380 VAC- 60 Hz 5.5 Hp
3" 1N1P 2900 RPM
Ürün No 8680023315521

Çöpماك ST 5700
400 VAC- 50 Hz 5.5 Hp
3" 1N1P 2900 RPM
Ürün No 8680023311738

Çöpماك ST 5700
450 VAC- 60 Hz 5.5 Hp
3" 1N1P 3480 RPM
Ürün No 8680023315555

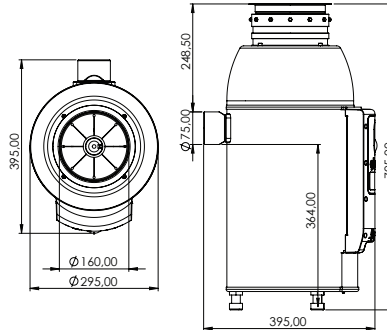

ÇÖPMAK®
Garbage Disposals
www.copmak.com

